

- Pedestrian Areas**
- Walkways**
- Building Entrances**
- Parking Lots**
- Shopping Malls**
- Landscape Areas**



AA-40/AA-41



AA-140/AA-141



AA-40-CL/AA-41-CLL



AA-140-CL/AA-141-CLL

Specifications



Certifications ETL and CETL listed for wet location. Meets IP65 standard.

Housing The housing shall be constructed of heavy duty cast aluminum with a minimum 3/16" wall thickness.

Shade The shade shall be constructed of heavy duty cast aluminum with a minimum 3/16" wall thickness.

Mounting Detail The AA-40/140 fixtures shall externally slip fit a 2-3/8" O.D. tenon (min 2-3/8" tall). The AA-41/141 fixtures shall externally slip fit a 3" O.D. tenon (min 3" tall).

The Bracket Mount (BM) shall externally slip fit a specified tenon.

Ballast The ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired and electronically tested before shipment.

Lens The lens shall be opal acrylic for wide angle light distribution or clear acrylic with louver system. (CLL option)

Lamp Holder The standard lamp holder shall be 4KV pulse rated medium base, for HID and Incandescent lamp sources.


Hardware All exposed hardware shall be stainless steel.

Finish BK-BZ-WH-GR-GY-NA are thermoset polyester powder coat. Custom color available upon request.

PROJECT
FIXTURE TYPE
CATALOG#

AA-40/AA-140

AA-41/AA-141

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ²	Options
AA-40/AA-140	26 CFT	CFT	120	BK Black	WM Wall Mount
	32 CFT	CFT	208	BZ Bronze	CLL Clear Lens with louvers
	42 CFT	CFT	240	WH White	BM2180 ³ Pole adaptor 2 @ 180°
	50 MH	E17	277	GR Green	BM3120 ³ Pole adaptor 3 @ 120°
	70 MH	E17		NA Natural Aluminum	BM490 ³ Pole adaptor 4 @ 90°
	100 MH	E17		GY Gray	
	35 HPS	E17		CC Custom Color	
	50 HPS	E17			
	70 HPS	E17			
	AA-41/AA-141	150 HPS	E17		
	150 MH	E17			

¹ Consult factory for other voltages.

² Thermoset polyester powder coat standard. Custom colors available on request.

³ Specify tenon size.


Note: E17 Lamps 150W and below are medium base.

CFT=triple biax


Example: AA-40-100MH-E17-277-BK-WM

Luminaire Dimensions


Luminaire	A		B		C		EPA	Weight	
	Inch	mm	Inch	mm	Inch	mm		lbs.	kg
AA-40	7.50	190	21.00	533	20.00	508	1.26	30	13.6
AA-40-WM	11.00	279	27.25	692	27.00	686	2.16	36	16.3
AA-40-BM2180	36.00	914					3.71	70	31.8
AA-41	8.65	220	23.69	602	23.38	594	1.77	52	23.6
AA-41-WM	11.00	279	28.63	727	30.38	772	2.67	58	26.3
AA-41-BM2180	36.00	914					4.73	114	51.7
AA-140	7.50	190	21.00	533	23.00	584	1.31	36	16.3
AA-140-WM	11.00	279	27.25	692	30.00	762	2.21	42	19.1
AA-140-BM2180	36.00	914					3.81	82	37.2
AA-141	8.65	220	23.69	602	25.38	645	1.87	60	27.2
AA-141-WM	11.00	279	28.63	727	32.38	822	2.77	66	29.9
AA-141-BM2180	36.00	914					4.93	130	59.0




AA-140/AA-141




AA-140-WM/AA-141-WM

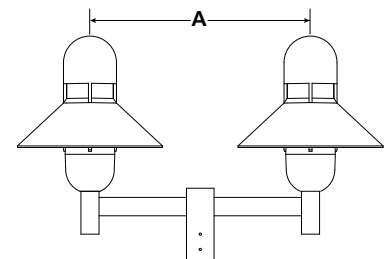


AA-140-BM2180/AA-141-BM2180



AA-40/AA-41



AA-40-WM/AA-41-WM

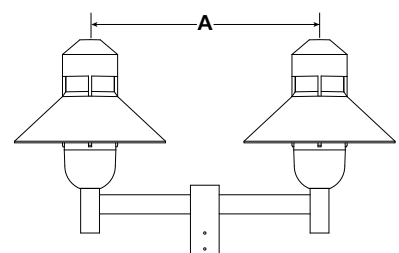

AA-40-BM2180/AA-41-BM2180