

- Parking Areas**
- Roadway**
- Pedestrian Walkways**
- Tennis Courts**
- Large Areas**



## Specifications



**Certifications** The fixture shall be ETL and CETL listed for wet location.

**Light Distribution** The AL-01 shall meet the specified light distribution and footcandle levels with an internal optical system and horizontal lamping.

**Assembly** The fixture shall be factory pre-wired, completely assembled and tested prior to shipment. Each AL-01 shall be provided with an aluminum arm 9" long for 1, 2 at 180° and CWB mounting configurations and 9" long for 2 at 90°, 3 at 90°, 3 at 120°, and 4 at 90° mounting configurations.

**Housing** The fixture housing shall be constructed from heavy gauge aluminum sheet, internally welded and silicone sealed.

**Door Frame Assembly** Extruded clear anodized aluminum door frame shall be furnished with fully tempered clear glass lens, thermal and shock resistant. White dacron open cell gasket prevents entry of moisture, dust and insects. All external hardware to be stainless steel.

**Ballast** Ballast shall be readily accessible, removable and insulated. The fixture is to be factory pre-wired and electronically tested before shipment. Quick disconnects are standard.

**Optical Assembly** The optical assembly shall be of all non-ferrous components with a multi faceted highly reflective specular finished reflector providing full cutoff, rotatable 90°.

**Finish** BK-BZ-WH-GY-GR-NA are thermoset polyester powder coat. VR finish is hand-rubbed over a black thermoset polyester powder coat. Custom color available upon request.

**Mounting Details** AL-01-SH4 Bracket externally slip-fits 2 3/8" O.D. tenons with 4" square fitter. AL-01-RH4 Bracket externally slip-fits 2 3/8" O.D. tenons with 4" round fitter. AL-01-BC denotes aluminum arm finished with hardware for direct mounting to side of pole. Luminaire shall be pre-wired with high temperature wire.

<b>PROJECT</b>
<b>FIXTURE TYPE</b>
<b>CATALOG#</b>

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at [www.lamprecycle.org](http://www.lamprecycle.org)

## Product Order Guide

Series	Mounting Type	Max Watts	Lamp Type	Voltage <sup>1</sup>	Reflector Type	Finish <sup>1</sup>	Options
AL-01-20	BC9	150 MHP	E17 <sup>2</sup>	120	I	BZ Bronze	F Fusing
	CWB	150 HPS	E17 <sup>2</sup>	208	II	BK Black	FF Double Fusing
	RH4			240	III	WH White	PCC Photo Control W/Receptacle
AL-01-24	SH4	400 MHP	ED28	277	V	GR Green	PL Polycarbonate Lens Shield
		400 HPS	BT37	347	F	VR Verde	HSS House Side Shield (Internal)
				480		GY Gray	QS Quartz Standby
						NA Natural Alum	FF480 Double Fusing 480V
					CC Custom Color	PSV Pole Side Visor (External)	


<sup>1</sup> Consult factory for other colors and voltages.

<sup>2</sup> Lamps 150 W and below are medium base.


## Example: AL-01-RH4/3T-400HPS-ED-18-120-III-BK-PCC

### Photometric Data


AL-01-400HPS-type III  
50000 Initial Lumens  
24.0 ft. Mounting Height  
10.0 ft. grid, Value in footcandles

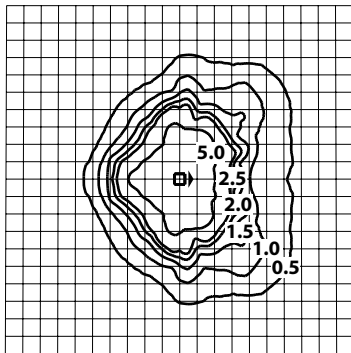

AL-01-400HPS-type F  
50000 Initial Lumens  
24.0 ft. Mounting Height  
10.0 ft. grid, Value in footcandles

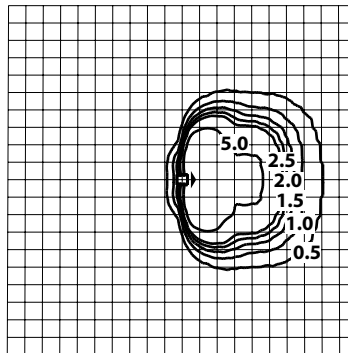


AL-01-400HPS-type V  
50000 Initial Lumens  
24.0 ft. Mounting Height  
10.0 ft. grid, Value in footcandles

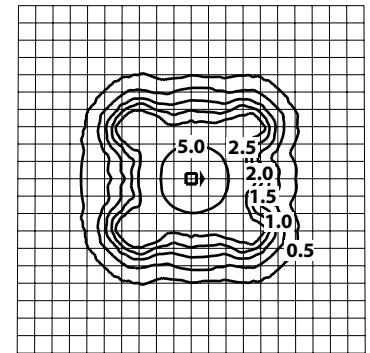

### Mounting Type

- BC9 Concealed Hardware Mounting Arm 9" long
- CWB Cast Wall Bracket
- SH4 4" Square Hub Mounting for 2-3/8" Tenon
- RH4 4" Dia. Round Hub Mounting for 2-3/8" Tenon

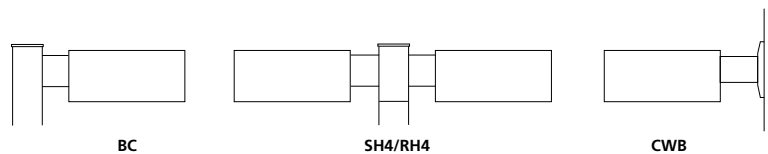

### Luminaire Dimension

Luminaire	A		B		C		Weight		EPA
	inch	mm	inch	mm	inch	mm	lbs.	kg	
AL-01-150W	20.0	508	15.0	381	6.5	165	26	11.7	1.26
AL-01-400W	24.0	610	19.0	483	8.0	203	48	21.7	1.82

