




Building Mount
14" Square
Corridor
Walkways
Accent
Building Entrances

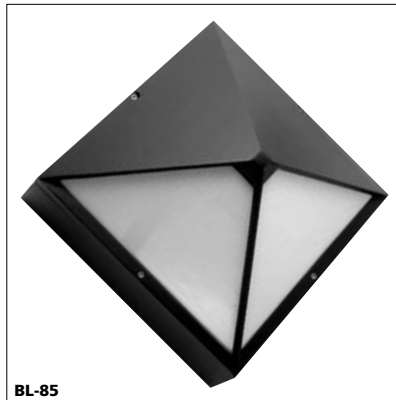

BL-85

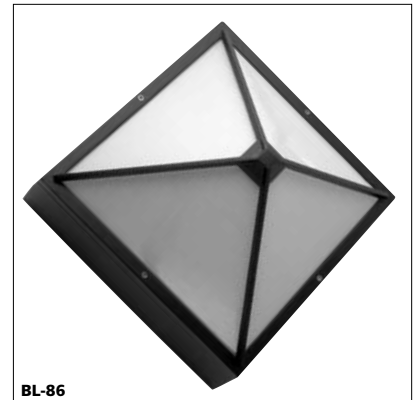

BL-86

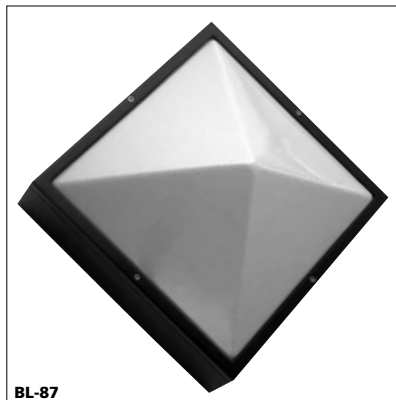

BL-87



BL-89

Specifications



Certifications The fixture shall be ETL and CETL listed for wet location. Also meets IP65 standard

Ballast Housing Cast aluminum with a minimum thickness of 1/8". Mounting plate welded to ballast housing for J-box mounting. Conduit mounting available, consult factory. Housing is fully gasketed with 3/16" extruded EDPM cord gasket.

Lens Frame Cast aluminum mounted to ballast housing with 10-24 stainless steel Allen cap screws.

Lens Opal UV-stabilized polycarbonate (OP) is standard on the BL-85/86/87. Lens supplied with one-piece extruded silicone gasket. The BL-89 lens shall be tempered flat and textured P62 glass with silicone gasket.

Ballast Fluorescent ballasts for 42CFT and 2-D lamps are electronic (minus 20° C). Other fluorescent 13- through 26-watt quad tube is core & coil (0° C).

Finish BK-BZ-WH-GR-GY-NA thermoset polyester powder coat which is electrostatically applied and bonded by heat fusion thermosetting. CC available upon request.

BL

PROJECT
FIXTURE TYPE
CATALOG#

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ¹	Options
BL-85/86/87/89	26 CFT	CFT ²	120	BK Black	EMG ³ Emergency Battery Backup
	(2) 26 CFT	CFT ²	208	BZ Bronze	
	32 CFT	CFT ²	240	WH White	
	42 CFT	CFT ²	277	GR Green	
				NA Natural Aluminum	
				GY Gray	
				CC Custom Color	
		50 MH	E17		
		70 MH	E17		
		50 HPS	E17		
	70 HPS	E17			

¹ Consult factory for other colors and voltages

² CF = single biax, CFQ = double biax, CFT = triple biax

³ EMG 750 lumens output for 30 minutes, -20F start temperature. 10' remote distance lamp to backup

Example: BL-85-70MH-E17-240-BK

Luminaire Dimensions

Luminaire	A		B		C		Weight	
	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
BL-85	20.00	508	8.50	216	14.00	356	17	7.7
BL-86	20.00	508	8.50	216	14.00	356	15	6.8
BL-87	20.00	508	8.00	203	14.00	356	15	6.8
BL-89	20.00	508	8.62	219	14.00	356	17	7.7

