

Landscape Areas
Wall Wash
Color LED Lighting
Flagpole Lighting
Building Accent
Pedestrian Areas
Sign Lighting
Accent Lighting



Specifications



- Certifications** ETL and CETL listed for wet location, direct burial, concrete pour and is also listed for indoor usage. Certified to IP65 and IP67 to ensure protection against the harshest environments. IEC compliant versions available, consult factory.
- Lamp/Ballast Housing** Compression molded Rhinolit™ composite material, structurally reinforced with glass fibers. Superior resistance to ultraviolet degradation and corrosion resistant in harsh environments. Trim Rng (TR) and Debris Cover (DC) supplied standard, unless the Soil Installation Kit selected (SIK).
- Splice Compartment** Supplied with two 3/4" NPT conduit entrances. Connection to ballast compartment by way of anti-wicking chamber. Sealed with gasketed die cast aluminum cover plate. Suitable for through wiring.
- Lens** Standard 3/4" clear tempered flat soda-lime glass (F) or ADA anti slip and walkover clear tempered flat soda-lime glass (ADA). Flat lenses will withstand loads up to 200 PSI. Sealed to housing with high temperature injection molded silicone gasket.
- Lens Frame** Heavy duty die cast bronze lens frame is supplied as standard. Fastened to housing with twelve captive 10-24 stainless steel Allen cap screws.
- Reflectors** Spun aluminum highly specular Alzak™ finish for either NEMA type 1 or 2 spot (SPT) or NEMA type 3 or 4 flood (FLD) distributions. Field adjustable up to 25° tilt and 360° horizontal rotation. NOTE: Tilt adjustment varies by lamp type. An asymmetric fluorescent reflector is available for one or two T5HO lamps. Multiple LED options available.
- Lamp Holder** Porcelain 4kv pulse rated for HID and Incandescent lamp sources.
- Options** Directional Shield (DS), Grout Mask (GM), Internal Glare Shield (IGS), Internal Hex Cell Louver (HL), Glass Color Filter (GF).
- Finish** Housing Black (BK). Options can be painted in standard or custom colors. Powder Coat Standard.
- Safety** Caution: Care should be taken when specifying fixtures for use in pedestrian walkways to avoid problems that may be caused by high lens temperatures. Consult factory for more information.
- Warning** Caution: Care should be taken not to install in-ground fixtures in areas where water can stand for prolonged periods of time. Sufficient drainage must be provided to avoid problems. Consult factory for more information.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 sales@allscape.net
 http://www.allighting.com

SL-29 TRIO

natural aluminum


bronze

gray

green

white

black

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Type	Lamp Voltage ¹	Optics	Optics	Optics	Optics	Optics	Optics	Optics	Options	Options
SL-29	Fluorescent											
	24FL		T5HO	120	ASYM	Asymmetric	F	Clear Flat	BK ²	Black	DS	Directional Shield ³
	2X24FL		T5HO	208				ADA Walkover	BZ ²	Bronze	IGS	Glare Shield
				240					WH ²	White	HL	Hex Cell Louver
	3X42CFT		CFT	277	FL	Fluorescent			GR ²	Green	GF	Glass Color Filter
									NA ²	Natural Alum	GM	Grout Mask
									GY ²	Gray	LFSS	Stainless Steel Lens Frame
									CC ²	Custom Color	ISW	Independent Switching
											AHOT ⁶	AIM-HOT™
											DIM	Dimmable 39WMH only
											SIK ⁷	Soil Installation Kit
	Metal Halide											
	3X20MH		BT5 ⁶	120	SPT	Spot						
	3X20MH		T4 ⁶	120/277	NFLD	Narrow Flood						
	3X39MH		T4 ⁶		MFLD	Medium Flood						
	3X39MH		T6 ⁶									
	2X70MH		T6 ⁶									
	2X70MH		T4 ⁶									
	3X20MH		HID-MR16 ⁴									
	3X39MH		PAR20 ⁴									
	3X39MH		PAR30 ⁴									
	3X39MH		R111 ⁴									
	2X70MH		PAR30 ⁴									
	LED											
	3X18WRGB	CUS3 ⁵	120 ¹	10,28								RGB (requires control system), Consult Factory
	3XTitan25WW	CUS3 ⁵	120-277	10,25,35,45								Warm White (3050K)
	3XTitan25TC	CUS3 ⁵	120-277	10,25,35,45								TruColor (3050K) 1290 Raw Lumens
	3XTitan25CW	CUS3 ⁵	120-277	10,25,35,45								Cool (Daylight) White (4700K)
	3XTitan25FIX	CUS3 ⁵	120-277	25,35,45								Fixed Color Red, Green, Blue, Amber

¹ Consult factory for other voltages and finishes.

² Powder Coat Standard

³ These options are supplied in heavy wall cast aluminum.

⁴ Does not require internal optics

⁵ The CUS3 uses a 25W Titan from Lamina or 18W RGB led from Philips Solid State.


⁶ AIM-HOT™ can be used with the T6, T4, BT5 spot, narrow flood and medium flood optical packages.

⁷ Required for soil or hollow floor installation



Example: SL-29-3X39MH-T6-277-SPT-F-BK-DS

Luminaire Dimensions

Luminaire	A		B		C		D		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SL-29HPBB-F	26.00	660	0.75	19	12.10	307	8.00	203	38	17.2
SL-29HPBB-DS	26.00	660	0.75	19	16.30	414	8.00	203	41	18.6

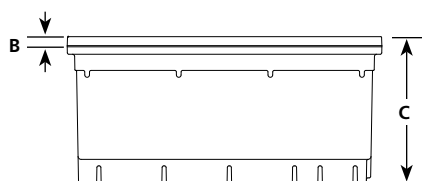

SL-29-F

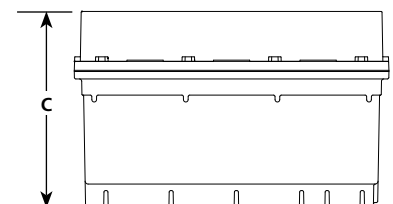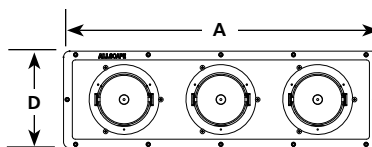

SL-29-DS