



SP


- Corridor**
- Walkways**
- Accent**
- General Lighting**

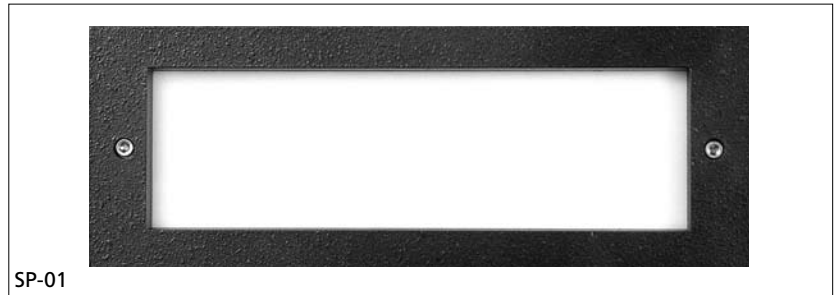

SP-01

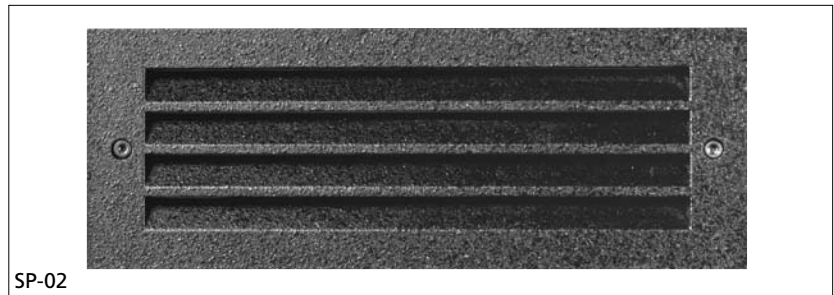

SP-02

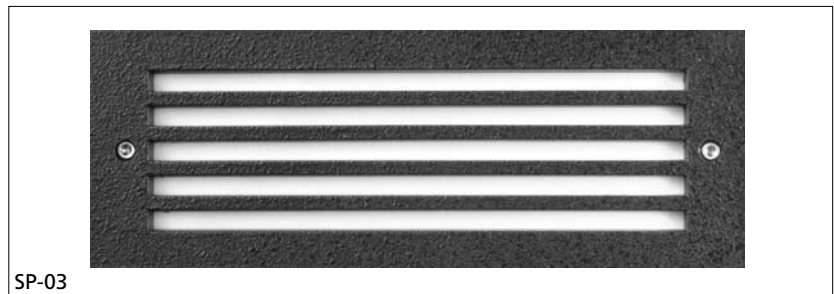

SP-03

Specifications

  **ADA INDOOR**

Certifications The fixture shall be ETL and CETL listed for wet location and concrete pour or indoor. The fixture shall meet ADA requirements.

Lamp/Ballast Housing Die-cast aluminum with two 1/2" NPT conduit entrances for through-wiring capability. Designed for concrete pour or wall stud mount.


Lens Frame Die-cast aluminum, fastened to lamp/ballast housing with two stainless steel socket head cap screws. SP-02 has four directional louvers, and SP-03 has five horizontal louvers (grill).

Lens Opal polycarbonate U.V. stabilized, sealed to lamp/ballast housing with closed cell silicone cord gasket.

Ballast Normal power factor only.

Finish BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

PROJECT
FIXTURE TYPE
CATALOG#

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org


Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ¹	Options
SP-01	40 INC	T10	120	BZ Bronze	INDR Indoor
SP-02	13 CF	CF ²	208	BK Black	REB Remote Emergency Battery
SP-03	18 CFQ	CFQ ²	240	WH White	
			277	GR Green	
				NA Natural Aluminum	
	22MH	BT5	120	GY Gray	
				CC Custom Color	


¹ Consult factory for other colors and voltages
² CF = single biax, CFQ = double biax, CFT = triple biax

Example: SP-01-40INC-T10-120-BK


Reflector Distribution Curves

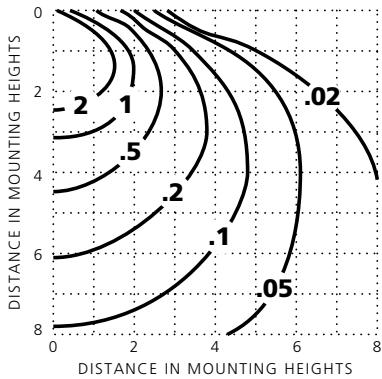

SP-01-9PL
 16" Mounting Height
 ISOLUX Curve—value in initial footcandles

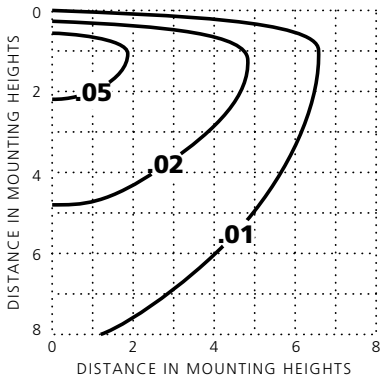

SP-02-9PL
 16" Mounting Height
 ISOLUX Curve—value in initial footcandles

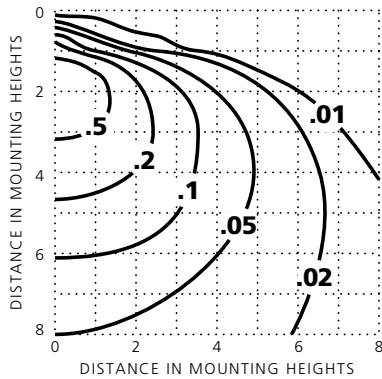

SP-03-9PL
 16" Mounting Height
 ISOLUX Curve—value in initial footcandles

Photometric Data

Conversion Factor				
Mounting Height	4"	8"	16"	24"
Footcandles Multiplier	16	4	1	0.4

Luminaire Dimensions

Luminaire	A		B		C		Weight	
	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SP-01/02/03	9.4	239	4.3	109	3.3	84	4	1.8

