



Corridor
Walkways
Accent
General Lighting

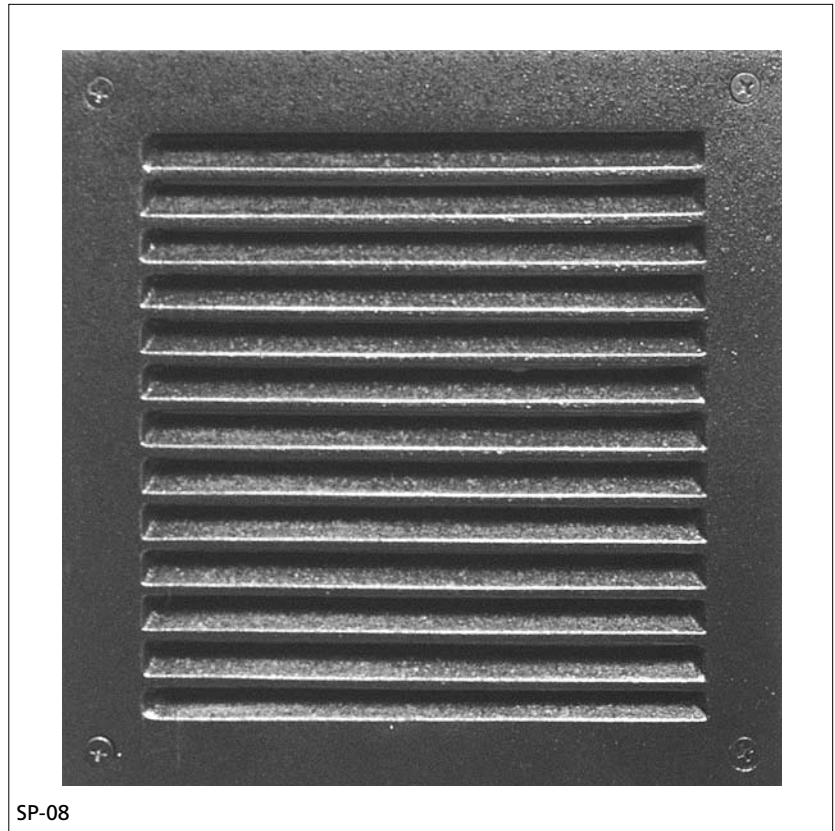

Specifications

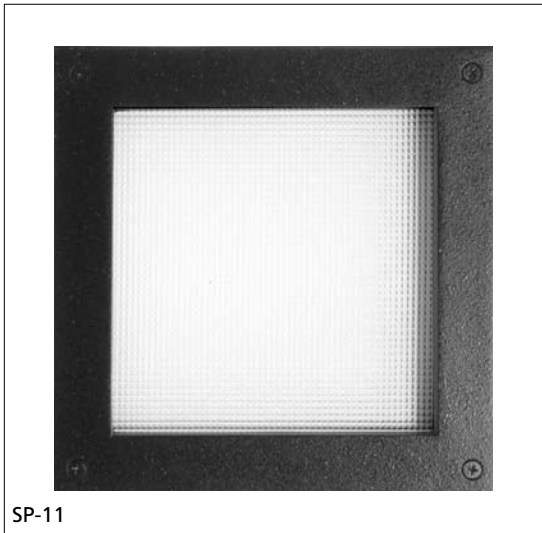

Certifications

The fixture shall be ETL and CETL listed for wet location and concrete pour. The fixture shall meet ADA requirements.

Lamp/Ballast Housing

Cast aluminum with two 3/4" NPT conduit entrances for through-wiring capability.

Lens Frame

Cast aluminum, with directional louvers (SP-08), fastened to lamp/ballast housing with four stainless steel screws.

Lens

Tempered prismatic glass sealed to lens frame with high temperature silicone.

Lamp Holder

Porcelain 4KV pulse rated medium base, for HID and Incandescent lamp source.


Reflector

Highly specular Alzak®, aluminum.

Finish

BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

PROJECT
FIXTURE TYPE
CATALOG#

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ¹
SP-08	100 INC	A19	120	BK Black
SP-11	100 HPS	E17	208	BZ Bronze
	100 MH	E17	240	WH White
	(2) 26 CFQ	CFQ ²	277	GR Green
	42 CFT	CFT ²		NA Natural Aluminum
	(2) 13 CF	CF ²		GY Gray
				CC Custom Color

¹ Consult factory for other colors and voltages

² CF = single biax, CFQ = double biax, CFT = triple biax

Example: SP-08-35HPS-E17-120-BK

Photometric Data

SP-08-50MH
Test height 4ft above grade
Clear Lamp 3500 Lumens

Values In Initial Footcandles

Distance	0	1	2	3	4	5	6
1	2.500	1.063	0.175	0.039	0.009	0.004	0.006
2	1.031	0.750	0.325	0.094	0.031	0.013	0.008
3	0.438	0.294	0.200	0.088	0.031	0.015	0.009
4	0.188	0.156	0.097	0.060	0.028	0.015	0.008
5	0.078	0.069	0.044	0.029	0.021	0.013	0.006
6	0.047	0.039	0.034	0.024	0.019	0.010	0.003

0 1 2 3 4 5 6
Distance in mounting Height

SP-11-50MH
Test height 4ft above grade
Clear Lamp 3500 Lumens

Values In Initial Footcandles

Distance	0	1	2	3	4	5	6
1	5.63	2.88	0.50	0.11	0.05	0.03	0.02
2	2.50	1.81	0.75	0.23	0.08	0.05	0.03
3	1.25	1.00	0.56	0.26	0.11	0.06	0.04
4	0.63	0.53	0.38	0.21	0.11	0.07	0.04
5	0.38	0.31	0.23	0.16	0.10	0.06	0.04
6	0.22	0.19	0.15	0.11	0.08	0.06	0.04
7	0.16	0.12	0.10	0.08	0.06	0.04	0.03
8	0.11	0.09	0.08	0.06	0.04	0.03	0.03

0 1 2 3 4 5 6
Distances in mounting heights

Conversion Chart

	3'	4'	5'	6'
Conversion Factor				
50MH 3500 Lumens	1.78	1	0.64	0.44
70HPS 5600 Lumens	2.84	1.60	1.02	0.70

Luminaire Dimensions

Luminaire	A		B		C		Weight	
	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SP-08/11	9.0	229	11.18	284	6.25	159	12	5.4

