



SP

**Corridor**  
**Walkways**  
**Accent**  
**General Lighting**

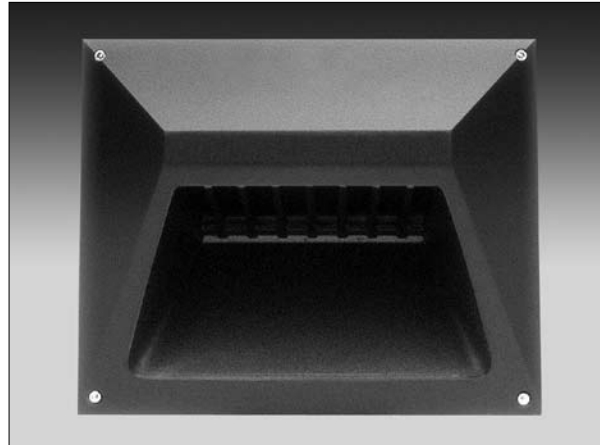

SP-30

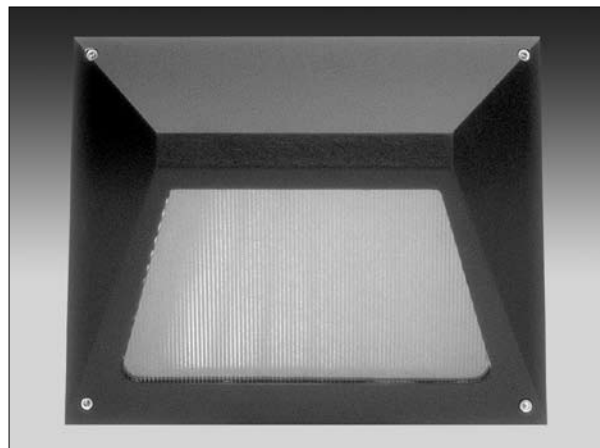

SP-31

## Specifications



**Certifications** The fixture shall be ETL and CETL listed for wet location and concrete pour. Also listed for through wiring. The fixture shall meet ADA requirements.

**Housing** Cast aluminum with a minimum wall thickness of 3/16" and two 3/4" NPT conduit entrances for through-wiring capability.

**Ballast** HID ballasts are HPF core and coil. Fluorescent ballasts 26/32/42 watt CF are electronic, universal voltage 120-277V, 50 or 60 Hz. All ballasts are factory wired and tested, mounted to a removable tray with quick disconnects, HPF.

**Lens / Optics** SP-30 uses tempered clear glass sealed to face plate with high temperature silicone and clips. SP-31 uses a sandwich of tempered clear glass with a linear spread lens backing sealed to the faceplate with high temperature silicone and clips. The reflector is highly polished specular aluminum multifaceted for optimum efficiency.

The SP-31 can be inverted for uplight applications.

**Trim Ring / Face Plate** Cast aluminum standard. Secured to housing with four 1/4-20 stainless steel allen cap screws. Sealed with closed cell silicone gasket to prevent entrance of dust, insects and moisture.

**Finish** BK-BZ-WH-GR-GY-NA is thermoset polyester powdercoat which is electrostatically applied and bonded by heat fusion thermosetting. CC available upon request.

PROJECT
FIXTURE TYPE
CATALOG#



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at [www.lamprecycle.org](http://www.lamprecycle.org)

## Product Order Guide

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Finish <sup>1</sup>	Options
SP-30/31	50/70 MH	E17	120	BK Black	F Fusing
	100 MH	E17	208	BZ Bronze	LT Left Throw Optics <sup>2</sup>
	150 MH	E17	240	WH White	RT Right Throw Optics <sup>2</sup>
			277	GR Green	QS Quartz Standby
	35/50 HPS	E17		GY Gray	EMG Emergency Battery Backup
	70 HPS	E17		NA Natural Alum.	
	100 HPS	E17		CC Custom	
	150 HPS	E17			
	(2) 18 CFQ	CFQ			
	26 CFT	CFT			
	(2) 26 CFT	CFT			
	32 CFT	CFT			
	42 CFT	CFT			
	18 LPS	T17			

<sup>1</sup> Consult factory for other colors and voltages

<sup>2</sup> SP-31 only

### Example: SP-31-100MH-E17-120-BK-RT


## Photometric Data

### SP-30-150MH

13,000 Initial Lumens

4.0 ft Mounting Height, 2.0 ft. grid

Value in footcandles

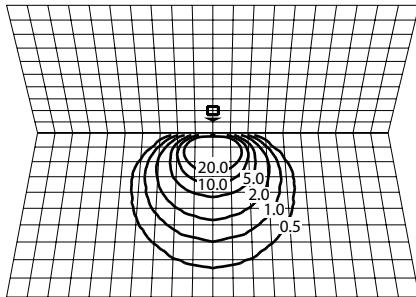


### SP-31-150MH

13,000 Initial Lumens

4.0 ft Mounting Height, 2.0 ft. grid

Value in footcandles

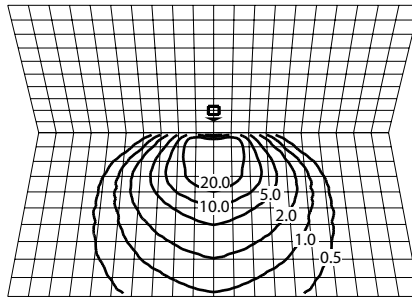


### SP-31-150MH-RT

13,000 Initial Lumens

4.0 ft Mounting Height, 2.0 ft. grid

Value in footcandles

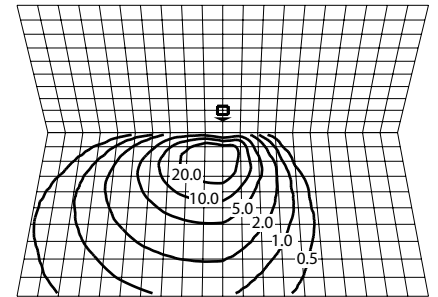

## Luminaire Dimensions

Luminaire	A		B		C		D		E		F		G		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SP-30/31	6.5	165	11.80	302	14.40	366	2.50	64	2.90	74	9.0	229	4.95	126	21	9.5

