


2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 Email: sales@allscape.net

INSTALLATION SHEET

Safety, Warnings and Suggestions


- ¹ **Care** should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- ² **Avoid** installing fixtures in locations where water collects and stands for prolonged periods.
- ³ **Make** sure that electrical power is disconnected before any work is performed.
- ⁴ **All** gaskets and sealing surfaces must be kept clean during installation.
- ⁵ **All** wiring and installation should meet local, state and national electrical codes.
- ⁶ **Install** correct lamp type and wattage.



P# 38708

© 2005 - 2008 ALLSCAPE. All rights reserved.
 ALLSCAPE is a registered trademark of Philips.

Due to a program of continuous improvement, ALLSCAPE reserves the right to make any variation in design or construction to the equipment described.

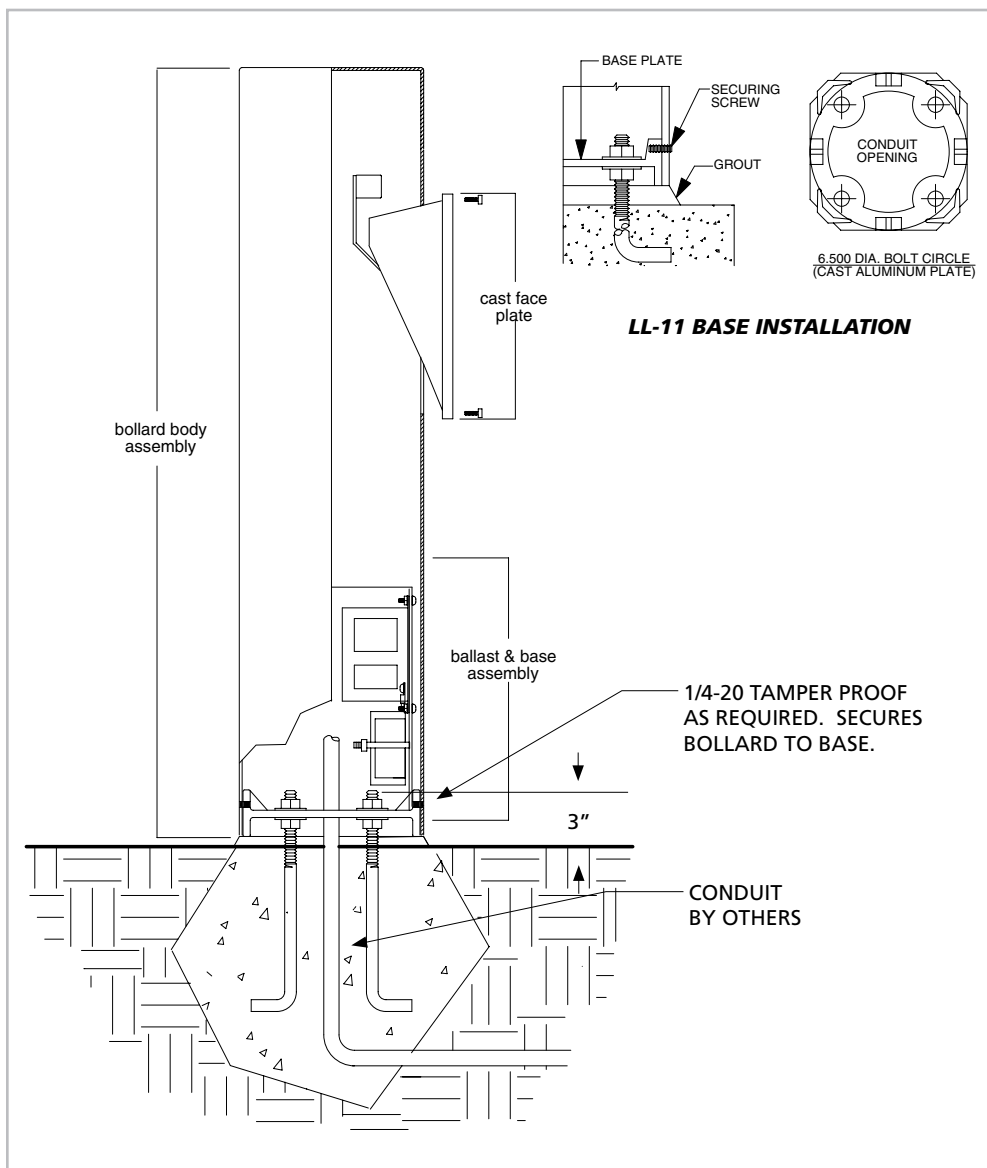

1. Prepare the site with adequate excavation and install the anchor bolts as per factory supplied template.
 2. Remove the bollard from ballast & base assembly by removing (4)-securing screws. Install the base assembly to anchor bolts and level.
 3. Make power and ground connection using UL approved connectors.
 4. Remove the cast face plate from the fixture housing by loosening (4)-cap head screws.
 5. Take the bollard body assembly and install over the cast base & ballast assembly and secure the body with the 1/4-20 tamper proof screws.
 6. Install the lamp to the cast face plate. Replace the cast face plate(s) with the 1/4-20 cap screws.
- NOTE: MAKE SURE BEFORE INSTALLING THE FACE PLATE, THAT THE GASKET IS PROPERLY SEATED.**